


industrial high power peltier element

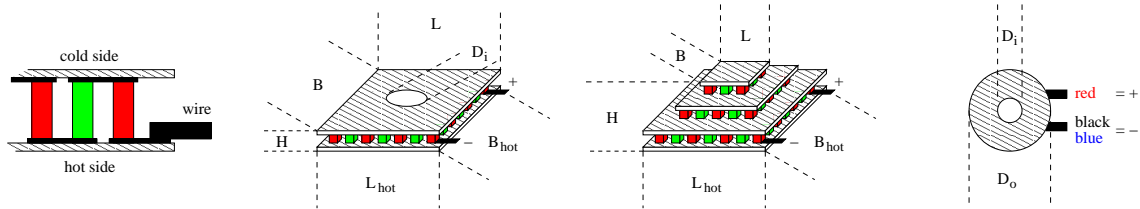


thermal and electrical data:

thermal force:

resistance:

thermal conductivity:

α_{300K}	0.0538	$\frac{V}{K}$
ρ_{300K}	3.41	Ω
γ_{300K}	0.313	$\frac{W}{K}$

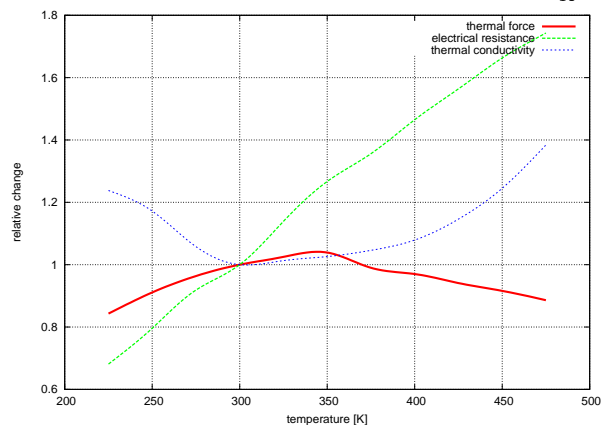

available maximum operating temperatures: T_{max} 80, 120, 150(non-ROHS!), 225 °C
 typical tolerances: $\pm 5\%$

mechanical data:

size of cold side:

$L \times B \times H$ 30.0 × 30.0 × 3.60 mm

size of hot side:

$L_{hot} \times B_{hot}$ 30.0 × 30.0 mm

height tolerance:

ΔH ± 0.25 mm

length and width tolerances:

ΔL and ΔB +0.5/ - 0.2 mm

weight:

m 15 g

ceramic plates:

BK-100 (grey), BK-96 (white) or AlN (opaque)

location of production:

Russia

experimental data:

typical values at:

		$T_h = 50^\circ C:$	$T_h = 300 K:$
maximum cooling power:	Q_{max}	44.3 W	38.2 W
	at $\Delta T = 0$ and $I_{Q_{max}}$	5.1 A	4.7 A
maximum temperature difference:	ΔT_{max}	80.0 K	71.0 K
	at $Q = 0$ and $I_{\Delta T_{max}}$	3.8 A	3.6 A
	U_{max}	17.4 V	16.1 V

order information:

TEC1H-30-30-44/80-B: max. 80°C
 TEC1H-30-30-44/80-C: max. 120°C
 TEC1H-30-30-44/80-D: max. 150°C
 TEC1H-30-30-44/80-G: max. 225°C

TEC1H-30-30-44/80-BS: sealed, max. 80°C
 TEC1H-30-30-44/80-CS: sealed, max. 120°C
 TEC1H-30-30-44/80-DS: sealed, max. 150°C
 TEC1H-30-30-44/80-GS: sealed, max. 225°C